



UNIVERSAL BELLOWS

Perfect for the Do-it-Yourselfer or the Professional Mechanic, Universal Rack Bellows can be cut to fit both the Tie Rod end and the Housing end. They will fit a wide variety of Rack & Pinion applications.

Simply compare the worn Bellow to the Universal Bellow. Check to see if it is Vented or Non-Vented. Lay the two Bellows on a flat surface. Compare and measure the large and small ends. Then simply cut the Universal Bellow using a common razor blade. Install with the Nylon Tie Straps included in the Kit. Replacing worn Bellows will help prevent premature failure of the Rack & Pinion Unit.

Packaged shown here on our distinctive **EMPI** 3-Color Display Card with Tie Straps and Instructions.


R & P Bellows



88-1000-C



88-1001-C

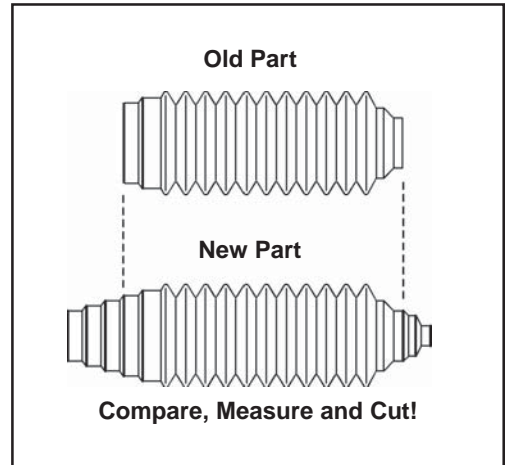

These Universal Rack Bellows can be cut to enlarge both the tie rod end and the housing end to fit a wide variety of applications.



Vent Tube

88-1000-0 (Non-Vented) - Bulk
For Non-Vented applications.

88-1001-0 (Vented) - Bulk
For Vented applications.

These two Universal Bellows may be purchased in bulk, kit form or skinpacked. Both kit and skinpacked are supplied with Nylon Tie Straps and Installation Instructions.

For kit form, simply change part number suffix from "-0" to "-K"
For skinpacked, simply change part number suffix from "-0" to "-C"



88-1000-K